

3,5 liter dust in 8 days
only upper side


Double-sided Doyle web cleaning system on corrugated paper machines



- Cleaning both sides
- 2500 mm web width
- With ionisation
- After 2. cutting and creasing station

Doyle
SYSTEMS


- 85 years experience
- market leader in the USA
- worldwide over 7.200 installations

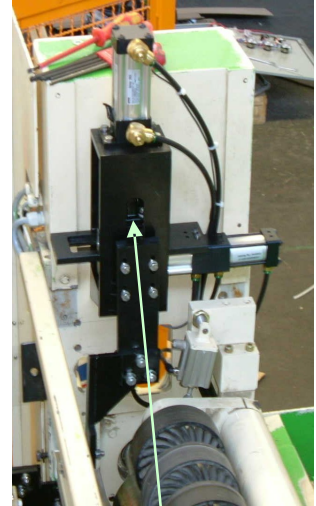

Retraction during
change of printing job.

- ✓ Up to 8500 mm working width
- ✓ Individual design of the manifold
- ✓ Retrofitting possible
- ✓ Antistatic bars
- ✓ Pneumatic and automatic retraction of the manifold
- ✓ Adjustment to material thickness
- ✓ Automation by control cabinet
- ✓ Service reduced and low maintenance of the system

Automatic adjustment to
given material thickness

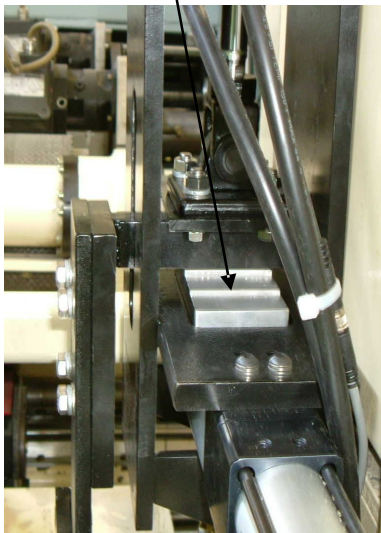

Individual design of the lower
manifold considering the movement
of the trim box.



Fan and
Filter unit
2 x 7,5 KW

1,5 ltr. dust in 2 days

printconcept
●●●● grafische maschinen

Doyle Sheet-fed cleaning systems for corrugate printing


Bobst
Flexo 200
View on operator
Side with fix
position



Exhauster
5,2 KW




Göpfert Evolution 2800 mm
Manifold in fix position

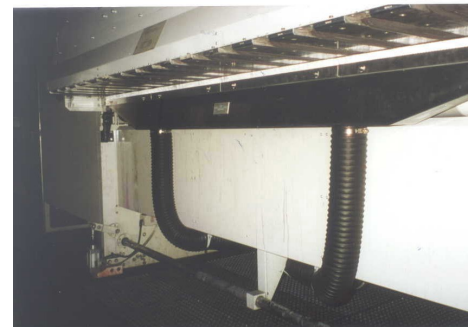

Göpfert Ovation 16/20
With automatically
adjustment



- ✓ Up to 8500 mm working width
- ✓ Individual design of the manifold
- ✓ Retrofitting possible
- ✓ Antistatic optional
- ✓ Automatic or manual retraction of the manifold
- ✓ Adjustment to material thickness
- ✓ Automation by control cabinet
- ✓ Service reduced and low maintenance of the system

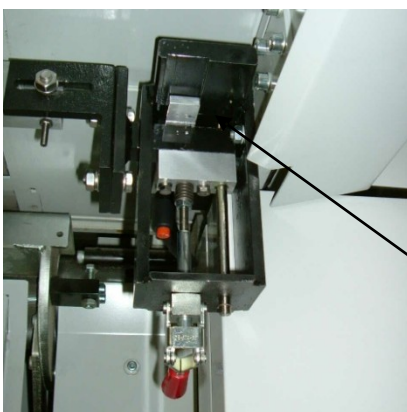

Manifold 2000 mm width
Bobst Masterflex-L



Manual retraction and adjustment
depending of the thickness of
the material